

CKC

# LIGHT IT LIKE IT



## Tourist M5



Adopts 500W CW LED light source  
 Total luminous flux 23,000 lumens  
 Beam Angle 3.5~53° zoom  
 CCT 6500K  
 IP66 rating, resistant to harsh environments such as rain, dust, and extreme temperatures, suitable for both indoor and outdoor applications

#### OPTAL

- Source: 500W CW LED
- Output: 23000 Lm
- Beam angle: 3.5 ~ 53°
- CCT: 6500K
- CRI: 72
- Lens diameter: 156 mm
- Source lifetime: 20000 H

#### EFFECT

- Strobe: 1~20Hz
- LED refresh rate: 900Hz~25KHz
- Rotation gobo wheel: 7 + 1
- Rotation gobo size: Outer diameter 23mm/Inner diameter 15mm/Thickness 1.1mm
- Fixed gobo wheel: 8 + 1
- Fixed gobo size: Outer diameter 23mm/Inner diameter 13mm/Thickness 1.1mm
- Color wheel: 7 + 1
- CMY + CTO
- Prism: 6 fact prism + 6 linear
- Frost: Light frost + Heavy frost
- Animation + With iris
- Framing: With 4 blade, can achieve fast and smooth cutting. The framing direction and angle of each blade can be controlled separately, and the each brade can realize complete beam closing. The whole cutting module can be rotated by  $\pm 60^\circ$

#### CONTROL & PROGRAM

- Channel: 38/56 CH
- Protocol: DMX512, RDM, ArtNet/sACN
- Data connector: 3PIN XLR, RJ45 In/Out
- Display: 2.8 inches touch screen, the operation panel has a rechargeable battery that allows you to access the menu to set the address code and make other settings without power on
- NFC: The fixture does not require power on, and the mobile app can change panel parameter settings such as address code and channel mode through NFC chip

#### SOFTWARE

- Via DMX signal to update
- Static waterproof fan, intelligent speed control
- Intelligent temperature protection to ensure LED service life

#### PAN & TILT MOVEMENT

- Pan: 540° or 630° 8bit/16bit
- Tilt: 270° 8bit/16bit

#### HOUSING

- Aluminum alloy structure + plastic (VO)
- Fan cooling
- Resistant to salt corrosion

#### POWER CONSUMPTION


- Voltage: AC 100V~240V 50/60Hz
- Rated power: 1030 W

#### OTHER


- IP rating: IP66
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

#### SIZE & WEIGHT

- Size: 398 × 281 × 666 mm
- N.W: 30.4 kgs

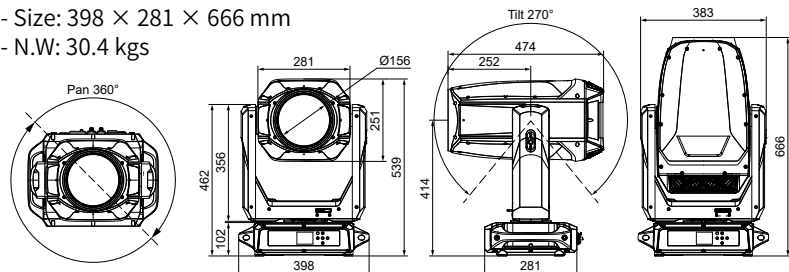

#### PHOTOMETRIC DATA

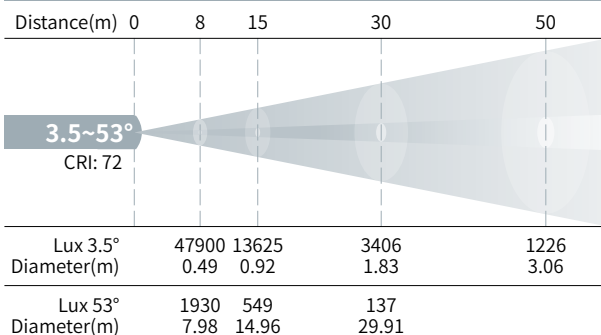

#### ROTATION GOBO



#### FIXED GOBO



#### COLOUR



#### FRAMING BLADES



#### ANIMATION



#### PRISM



#### FROST

