

CKC

LIGHT IT LIKE IT



V4s IP



Adopts 400W CW LED light source
 Total luminous flux 17,300 lumens
 Beam Angle 7° ~40° zoom
 CCT 6500K
 IP65 rating, resistant to harsh environments such as rain, dust, and extreme temperatures, suitable for both indoor and outdoor applications

OPTAL

- Source: 400W CW LED
- Output: 17300 Lm
- Beam angle: 7 ~ 40°
- CCT: 6500K
- CRI: 72
- Lens diameter: 108 mm
- Source lifetime: 20000 H

EFFECT

- Strobe: 1~25Hz
- LED refresh rate: 1200Hz~25KHz
- Rotation gobo wheel: 7 + 1
- Rotation gobo size: Outer diameter 23mm/Inner diameter 19mm/Thickness 0.5mm
- Fixed gobo wheel: 8 + 1
- Color wheel: 7 + 1
- CMY + CTO
- Prism: 6 fact prism + 6 linear
- Frost: Light frost + Heavy frost
- Animation

CONTROL & PROGRAM

- Channel: 24/29/36 CH
- Protocol: DMX512, RDM
- Data connector: 3PIN XLR
- Display: 1.8 inches touch screen, the operation panel has a rechargeable battery that allows you to access the menu to set the address code and make other settings without power on

SOFTWARE

- Via DMX signal to update
- Static waterproof fan, intelligent speed control
- Intelligent temperature protection to ensure LED service life

PAN & TILT MOVEMENT

- Pan: 540° or 630° 8bit/16bit
- Tilt: 270° 8bit/16bit

HOUSING

- Aluminum alloy structure + plastic (VO)
- Fan cooling
- Resistant to salt corrosion

POWER CONSUMPTION


- Voltage: AC 100V~240V 50/60Hz
- Rated power: 561 W

OTHER

- IP rating: IP65
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 406 × 290 × 612 mm
- N.W: 27.7 kgs

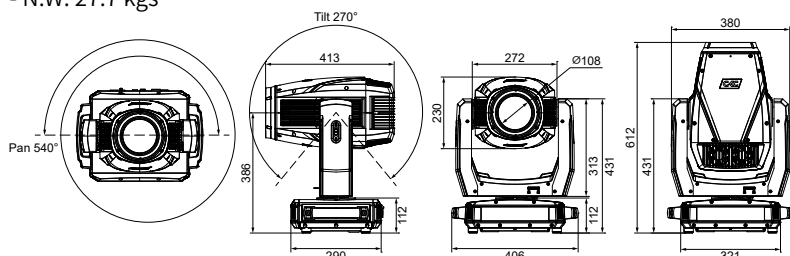

PHOTOMETRICAL DATA

Distance(m)	0	5	8	15	30
Lux 7°		33800	13400	3755	933
Diameter(m)		0.61	0.98	1.83	3.67
Lux 40°		2000	1070	222	55
Diameter(m)		3.64	5.82	10.92	21.84

ROTATION GOBO



FIXED GOBO



COLOUR



ANIMATION



PRISM



FROST

