


CKC

LIGHT IT LIKE IT



Proxima TINY

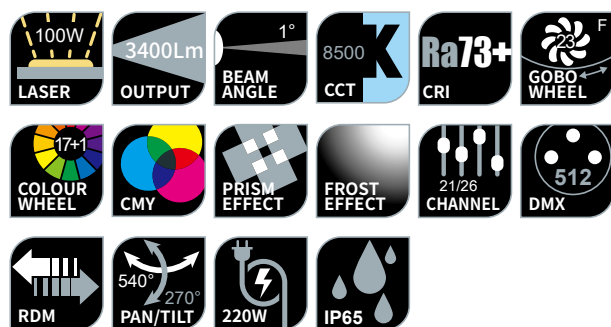

Adopts 100W laser source
 Total luminous flux 3,400 lumens
 Beam Angle 1°
 CCT 8500K
 132000 Lux@15m
 IP65 rating, resistant to harsh environments such as rain, dust, and extreme temperatures, suitable for both indoor and outdoor applications

OPTAL

- Source: 100W laser
- Output: 3400 Lm
- Beam angle: 1°
- CCT: 8500K
- CRI: 73
- Lens diameter: 150 mm
- Source lifetime: 20000 H
- Lux: 132000 Lux@15m

EFFECT

- Strobe: 1~20Hz
- Fixed gobo wheel: 23 + 1
- Color wheel: 17 + 1
- CMY
- Prism: 16 fact prism + 6 linear
- Frost: 1

CONTROL & PROGRAM

- Channel: 21/26 CH
- Protocol: DMX512, RDM
- Data connector: 3PIN XLR
- Display: 1.8 inches touch screen, the operation panel has a rechargeable battery that allows you to access the menu to set the address code and make other settings without power on

SOFTWARE

- Via DMX signal to update
- Static waterproof fan, intelligent speed control
- Intelligent temperature protection to ensure LED service life

PAN & TILT MOVEMENT

- Pan: 540° or 630° 8bit/16bit
- Tilt: 270° 8bit/16bit

HOUSING

- Aluminum alloy structure + plastic (VO)
- Fan cooling
- Resistant to salt corrosion

POWER CONSUMPTION


- Voltage: AC 100V~240V 50/60Hz
- Rated power: 220 W

OTHER


- IP rating: IP65
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 359 × 239 × 504 mm
- N.W: 19.2 kgs

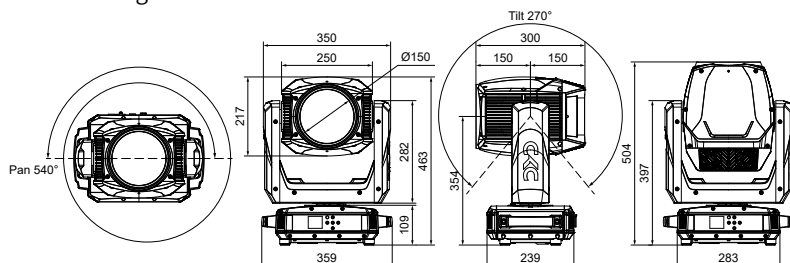

PHOTOMETRICAL DATA

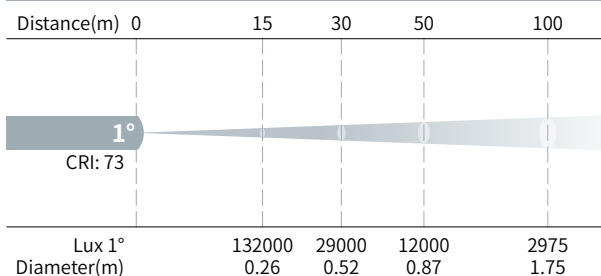

FIXED GOBO



COLOUR



PRISM



FROST

