

CKC

# LIGHT IT LIVE IT



## V10



Adopts 1000W CW LED light source  
 Total luminous flux 41,000 lumens  
 Beam Angle 6° ~52° zoom  
 CCT 6500K

#### OPTIC

- Source: 1000W CW LED
- Output: 41000 Lm
- Beam angle: 6 ~ 52°
- CCT: 6500K
- CRI: 72(With CRI filter 90)
- Lens diameter: 158 mm
- Source lifetime: >20000 H

#### EFFECT

- Strobe: 1~25Hz
- Rotation gobo wheel: 6 + 1
- Fixed gobo wheel: 7 + 1
- Gobo size: Outer diameter 30mm/Inner diameter 25mm/Thickness 1.1mm
- Color wheel: 6 + 1
- CMY + CTO
- Prism: 4 fact prism + 6 linear
- Frost: Light frost + Heavy frost
- Animation + With iris
- Framing: With 4 blade, can achieve fast and smooth cutting. The framing direction and angle of each blade can be controlled separately, and the each brade can realize complete beam closing. The whole cutting module can be rotated by  $\pm 60^\circ$

#### CONTROL & PROGRAM

- Channel: 36/52 CH
- Protocal: DMX512, RDM
- Data connector: 3PIN XLR
- Display: 2.8 inches touch screen, the operation panel has a rechargeable battery that allows you to access the menu to set the address code and make other settings without power on

#### SOFTWARE

- Via USB & DMX signal to update
- Static waterproof fan, intelligent speed control
- Intelligent temperature protection to ensure LED service life

#### PAN & TILT MOVEMENT

- Pan: 540° or 630° 8bit/16bit
- Tilt: 270° 8bit/16bit

#### HOUSING

- Aluminum alloy structure + plastic (VO)
- Fan cooling

#### POWER CONSUMPTION


- Voltage: AC 100V~240V 50/60Hz
- Rated power: 1213 W

#### OTHER

- IP rating: IP30
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

#### SIZE & WEIGHT

- Size: 428 × 304 × 804 mm
- N.W: 40 kgs

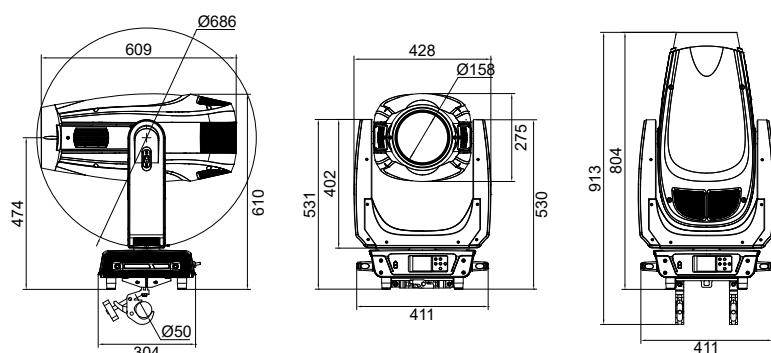

#### PHOTOMETRIC DATA

| Distance(m) | 0 | 8     | 15    | 30    | 50    | 100   |
|-------------|---|-------|-------|-------|-------|-------|
|             |   |       |       |       |       |       |
| Lux 6°      |   | 32100 | 9920  | 2160  | 808   | 205   |
| Diameter(m) |   | 0.84  | 1.57  | 3.14  | 5.24  | 10.48 |
| Lux 52°     |   | 1089  | 280   | 75    | 28    |       |
| Diameter(m) |   | 7.80  | 14.63 | 29.26 | 48.77 |       |


#### ROTATION GOBO



#### FIXED GOBO



#### COLOUR

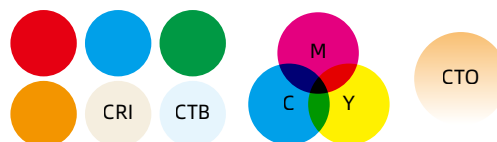

#### FRAMING BLADES



#### ANIMATION



#### PRISM



#### FROST

