


CKC

V2⁵IP

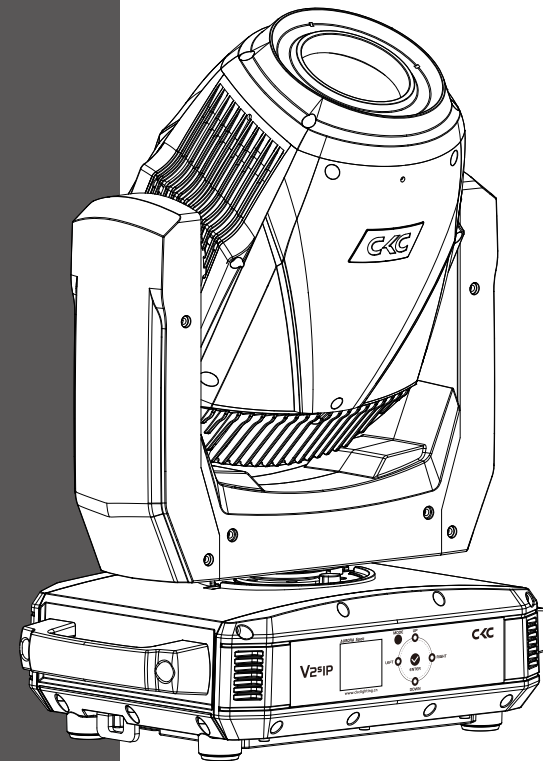

CKC LIGHTING CO.,LTD

Addr.:335 Nansha Avenue, Tung Chung Town,
Nansha District, Guangzhou City, China.
TEL: (020)3920 4506 FAX: (020)3920 4631
WEB: www.ckclighting.com

www.ckclighting.com



Before carrying out any installation, maintenance, or cleaning of the lighting fixtures, please confirm that the power has been cut off! Before using this fixture, please read this manual. Our company reserves the right to change product design and specifications without prior notice.

CONTENTS

1. Security Warning Information	1
2. Product Introduction	3
2.1 Exterior dimensions	3
2.2 Fixture packaging accessories	3
3. Main technical parameters of the equipment	3
4. Packaging and transportation	6
4.1 Disassemble packaging	6
4.2 Equipment installation	6
5. Installation Requirements Explanation	7
5.1 Clamp installation	7
5.2 Fixture installtion	8
5.3 Hanging Installation Diagram	8
6. Power and signal connection	9
6.1 Power and signal socket	9
6.2 Power Connect	9
6.3 Signal Connect	10
7. Control panel	10
7.1 Panel Introduction	10
7.2 System menu	11
8. DMX control channel table	13
9. Control circuit diagram	20
10. Regular maintenance	21
10.1 Cleaning and maintenance	21
10.2 Fault analysis and handling	21

★ Statement ★

- This manual contains important information on safe use and installation. Please read it carefully and follow the requirements for operation and installation. Please keep this manual properly;
- The equipment has good performance and complete packaging when it leaves the factory. The operator should strictly follow the warning items and operating instructions stated in the manual. Any malfunction or damage caused by misuse or neglect of the manual is not within the scope of our company's responsibility and warranty;
- The relevant information in this manual is for reference only. All lighting products are subject to the actual product. Any changes will not be notified separately, and our company reserves the right of final interpretation.

1. Security Warning Information



Attention !

Please read the safety requirements information in this section carefully before installing, powering on, operating, or repairing the lighting fixtures.



- This product is for professional use and is not suitable for other purposes;
- After receiving the lighting fixtures, please check if the packaging is complete and unpack to check if the equipment has been damaged due to transportation. If there is any damage caused by transportation, please do not use this lamp and contact local technicians or manufacturers as soon as possible;
- When transporting again, please use the original packaging materials;
- If there is obvious damage to the machine casing, it should be replaced in a timely manner;
- When hanging lamps, it is necessary to verify that the hanging equipment can withstand more than 6 times the weight of the lamp. After installation, it is necessary to verify that the lamp cover and installation buckle are secure and undamaged. At the same time, a safety rope should be used as an auxiliary safety for the lamp and fixed on the truss;
- The light source inside this luminaire should be replaced by the manufacturer, its service agent, or a similarly qualified person;
- If you have any other questions about how to safely operate the equipment, please contact our technical personnel or call our service hotline;
- This product has a protection level of IP65 and can be used both indoors and outdoors;
- Avoid direct external strong light shining on the lens, which may cause the lens to focus and burn out internal components.



- Lighting fixtures should be kept clean and avoid prolonged use in overheated or dusty environments to prevent contact with chemical liquids;
- When using the product, attention should be paid to avoiding serious or fatal injuries caused by fire, heat, electrical shock, and ultraviolet radiation. Before powering on or installing, read the instruction manual first. Follow the safety precautions for operation and pay attention to the warning signs on the instructions and equipment;
- Only professionals are allowed to install, operate, and maintain lighting fixtures, and strictly follow the procedures stated in the operating instructions.



- The eyes cannot directly look at the luminous object;
- Do not connect this device to any dimmer;
- If visible damage occurs to the protective casing, lens, and display screen on the lighting fixture, it is considered as damage to the point of loss;
- Please do not place any filters or other items at the light outlet, and do not replace non original parts;
- The minimum safe illumination distance of the lamp is 1m.



- Before installation, please confirm that the power supply voltage used matches the voltage indicated on the light fixture. Each lighting fixture should be properly grounded and electrically installed according to relevant standards;
- Please disconnect the power before repairing or cleaning the equipment;
- During the operation of the lighting fixtures, touching the wires is prohibited to prevent electric shock;
- If the external soft cable or wire of this lamp is damaged, the wire should be replaced by the manufacturer, its agent, or a similarly qualified person to avoid danger;
- Avoid flammable liquids, water, or metal conductors from entering the interior of the lamp to prevent electric shock or fire. If any foreign objects enter the lamp, immediately cut off the power supply;
- When multiple lamps are operated in series, the signal lines can be connected in multiple ways, but the power supply must be connected separately.




- The lighting fixtures work normally at -20 °C to 45 °C . When replacing any components or accessories in the equipment, ensure that the power is disconnected to prevent electric shock and injury;
- The maximum surface temperature of the lamp during operation can reach 55°C , please do not touch it with bare hands.



- The lighting fixtures must be installed in a sufficiently ventilated area, at least 0.5m away from adjacent surfaces, to ensure that no ventilation holes are blocked;
- Do not install the lighting fixtures directly on flammable objects;
- The minimum distance between all outer surfaces of the lamp and combustible materials is 0.5m.


2. Product Introduction

2.1 Exterior dimensions of lighting fixtures

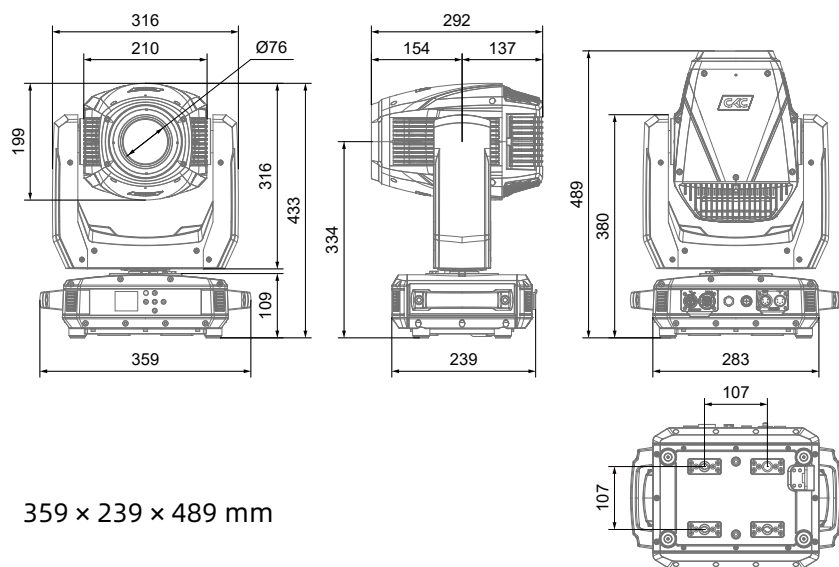

2.2 Packaging accessories

Name	QTY
Omega bracket	2 PCS
Clamp	2 PCS
Safety cable	1 PCS

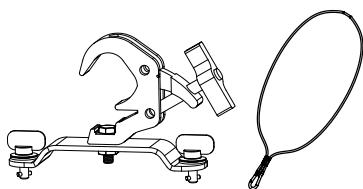

3. Main technical parameters of the equipment

Product execution standards: GB7000.1-2023, GB7000.217-2023, Q/YF-2017

● Electrical parameter


Rated input voltage: AC 100V-240V~ 50Hz/60Hz
 Rated power of the entire fixture: 319W
 Power factor: 0.994F
 Input Current: 1.55A 220V

● Source lifespan

>20000 hours


● Color system

CCT: 20000K
 CRI: 77
 Color wheel 1: 8+1
 Color wheel 2: 8+1

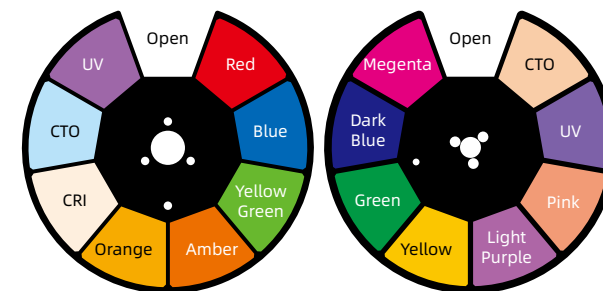

● Gobo system


Gobo outer diameter: 23 ± 0.2 mm
 Internal diameter: 19mm
 Thickness: 0.5mm

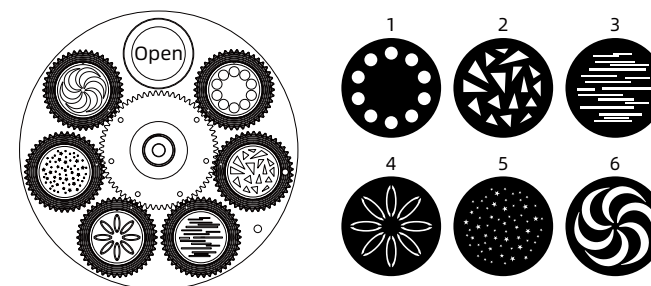


Gobo replace

1) Rotation gobo wheel


a). Pull out the power and signal adapter at point **A**, remove the two screws at point **B**, and extract the Gobo component;

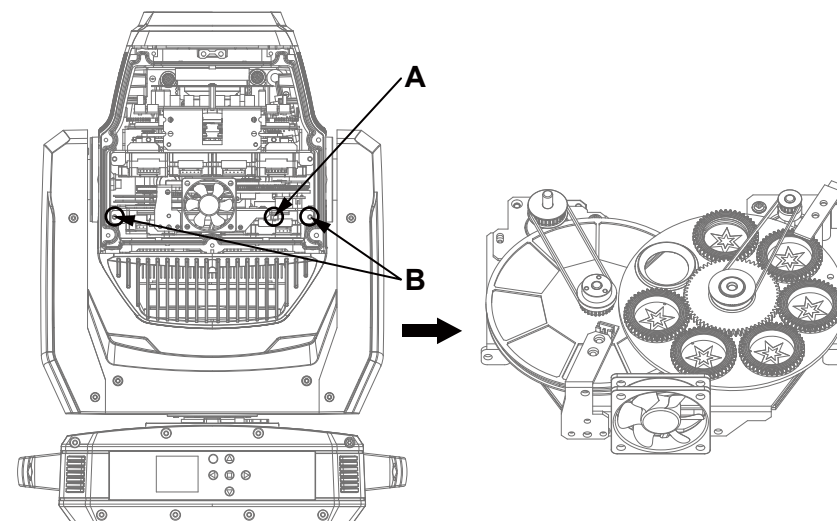

b). Use tweezers or other small grippers to remove the clamp of the Gobo holder spring and pick up the Gobo;

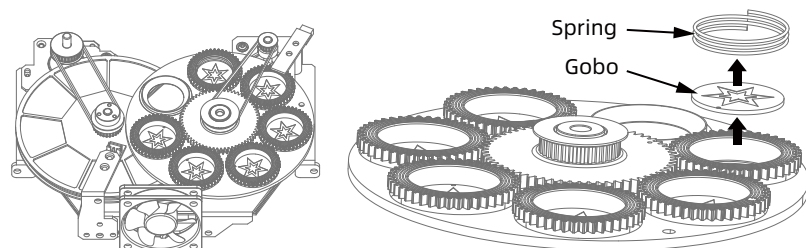


c). When assembling the Gobo, the black spray on the Gobo should face upwards and the notch position should be aligned with the positioning point (depression) of the driven wheel component **C**; After installation, simply reinstall the Gobo wheel component onto the fixture.

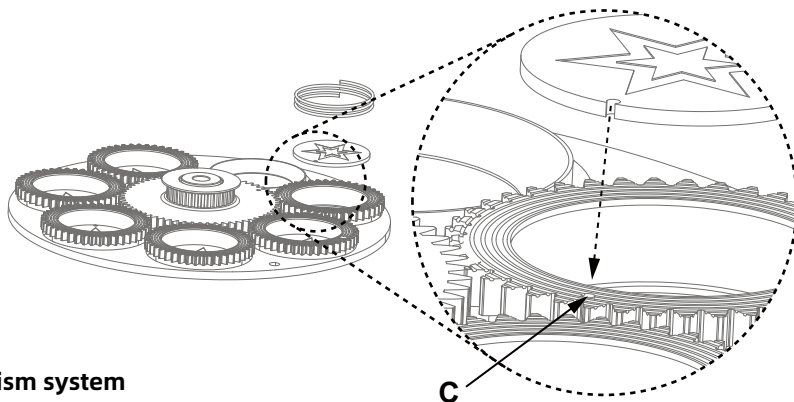

● Prism system


6 prism+ 5 linear

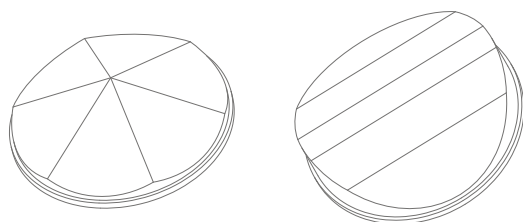

● Pan/Tilt

Pan scan:
540° or 630° 8-bit/16bit precision scanning

Tilt scan:
270° 8-bit/16bit precision scanning

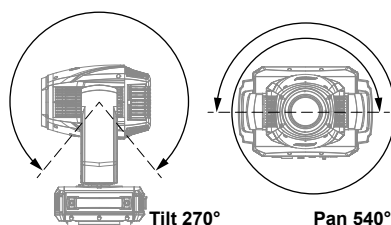

● Optical system

Beam angle: 12 ~ 23°
Source: 200W CW LED
Output luminous flux: 8000 Lm

● Control and programming

Control channel: 17CH/20CH/22CH
Protocol: DMX512, RDM
Data connect: 3 or 5 pin signal in/out

● Illumination draw

12°	5	8	10	12
Lux	5847	2278	1460	1019
Distance(m)	1.05	1.68	2.10	2.52

23°	5	8	10	12
Lux	3200	1244	882	591
Distance(m)	2.03	3.26	4.07	4.88

● Other effect function

Fast electronic strobe: 1~25Hz
LED refresh frequency: 1200Hz~25KHz

Frost: Light frost+heavy frost

● Other features and functions

Weight: 17.2 KG

4. Packaging and transportation

4.1 Disassemble packaging



Notice: After receiving the fixture, please unpack and check for any damage caused by transportation. If there is any damage caused by transportation, please do not use this fixture and contact the local technical personnel or manufacturer as soon as possible.


4.2 Equipment packaging

- 1). Disconnect the power supply before packaging the lighting fixtures to allow them to cool completely;
- 2). Flight cases can only be stacked in two layers and are not allowed to be reversed.

5. Installation Requirements Explanation

5.1 Clamp install



The lighting fixtures can be installed on the stage or on any direction of the truss, and the clamp can be quickly and easily locked onto the truss.



Warning !

The lighting fixtures are divided into two versions: integrated light hook and normal. When using the integrated light hook version, the clamp is broken up and locked onto the truss. The normal version must use 2 clamps to secure the device and fasten it with a 1/4 rotation. Regardless of the version, one safety rope must be added and connected to the base hole, but be careful not to connect it to the handling handle.


Integrated clamp installation

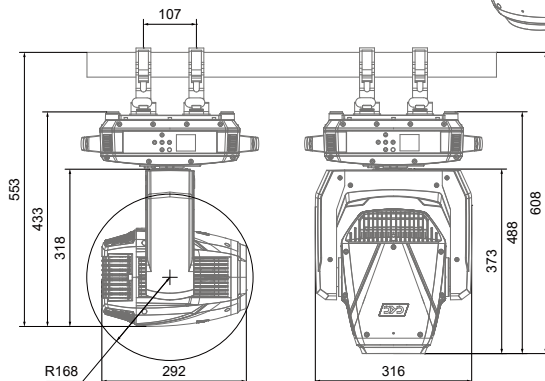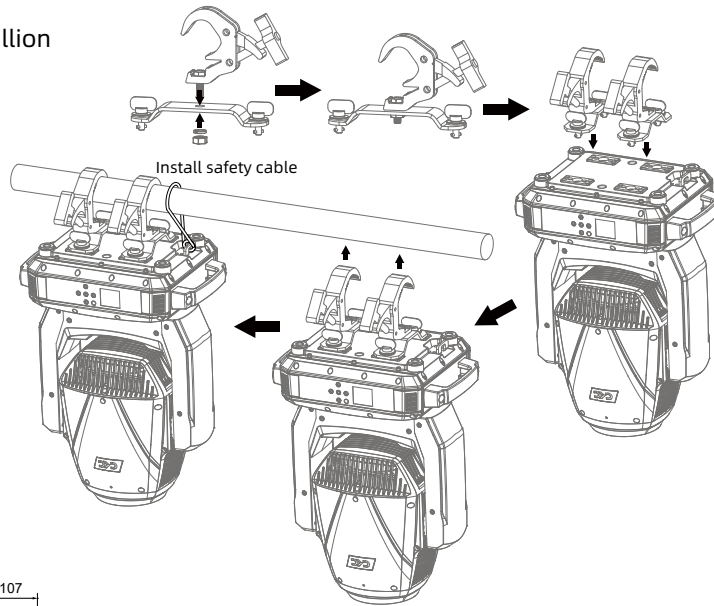

5.2 Equipment installation

- 1). Before installation, it is necessary to verify that the lamp hook and safety rope are not damaged, and that the installation object can withstand 6 times the total weight of the lamp and cable accessories;
- 2). Install the quick lock clamp on the base of the lamp body. Insert the clamp horizontally into the mounting hole of the base, rotate it clockwise 1/4 turn to lock it, and install the second clamp using the same method (the shape of the clamp should be based on the actual product).


5.3 Hanging Installation Diagram

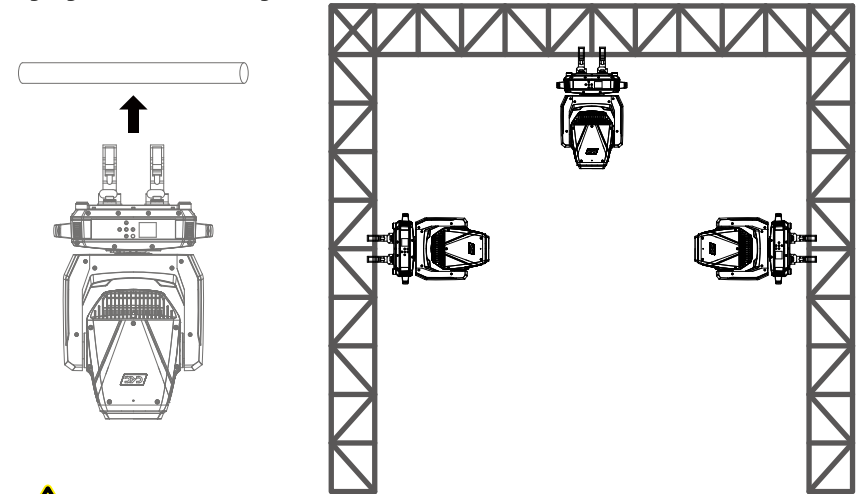

Reminder: External beam source may damage internal lighting fixtures

External beams from direct sunlight, lighting fixtures, and lasers that are directly focused onto the casing or penetrate the lens to illuminate the interior of the fixture may cause damage to the components. This is a common issue with all lighting fixtures and does not occur alone with CKC products. Although there is no way to completely prevent this problem from occurring, following the following guidelines can prevent potential damage.


When unpacking, installing, using, and stopping the operation of the lighting fixtures, please do not expose the transparency of the fixtures the mirror is exposed to direct sunlight, other lighting fixtures, or laser beams, Do not directly focus the beam of this device onto another lighting fixture.

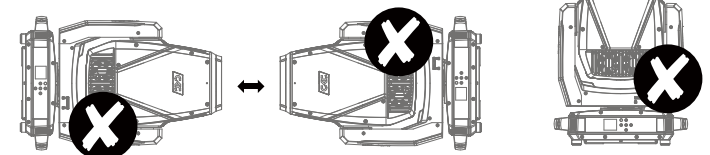

6. Power、Signal connect

6.1 Power and signal socket

- 1.Power input
- 2.Power output
- 3.Breathable valve
- 4.Fuse holder
- 5.DMX output
- 6.DMX input

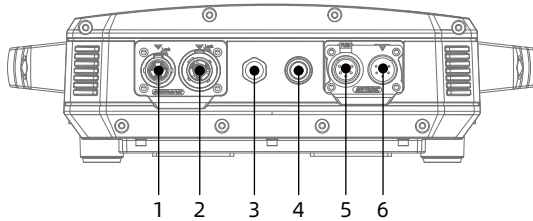

6.2 Power connect

Connection method:

L(live wire) - brown wire


E(Ground wire) - yellow/green dual color line

N(Zero Line) - Blue Line

When connecting the power supply, please note that the voltage and frequency of the power supply must match the voltage and frequency marked on the light fixture. When multiple fixtures are used simultaneously, it is recommended to connect the power supply of each fixture separately, so that each fixture can be individually controlled for power on/off.



Attention: When connecting the power supply, the ground wire (yellow/green dual color wire) must be safely grounded and comply with all relevant electrical installation standards.

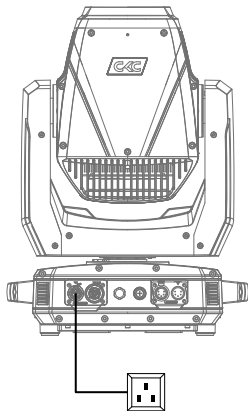

Power In


This product uses Powercon In/Out to connect power cable. Due to power limitations, a 2mm power cable can drive up to 7 fixtures at 220V and up to 3 fixture at 110V.

Warning !


- Do not connect too many fixtures or overload a single power cord;
- Do not use power cords with damaged insulation layers, and do not place power cords on other wires;
- When the fixture is not in use or cleaned, please unplug the power cord; Do not forcefully unplug or drag the power cord directly.




6.3 Signal connect

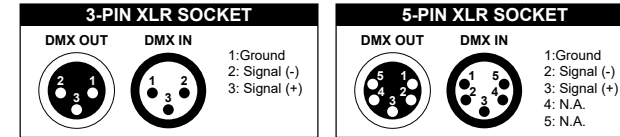

The lighting fixtures are equipped with standard DMX XLR input and output sockets. Please use DMX512 shielded twisted pair signal cables or Category 3/5 or above network twisted pair cables for connection. The typical connection distance for DMX signal lines is 150 meters. When transmitting signals over long distances, a DMX512 signal amplifier must be added.

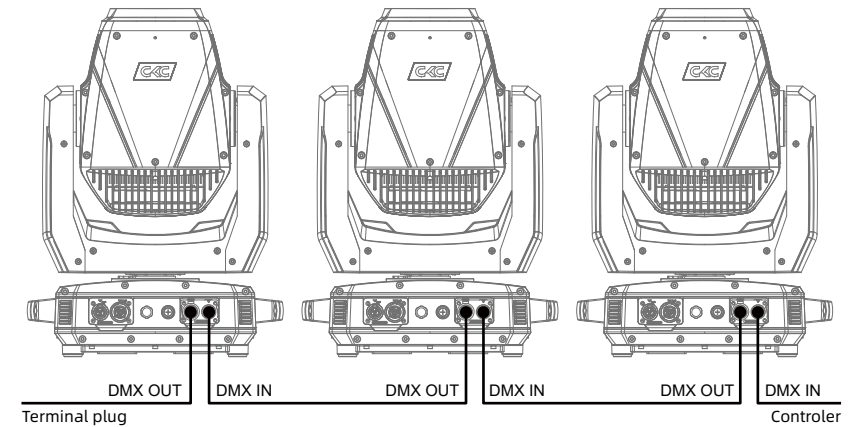


Connect a shielded twisted pair signal cable from the DMX output port of the controller to the DMX input port of the first device, and from the DMX output port of the first device to the DMX input port of the second device, and so on, until all the lamps are connected. Then install a terminal plug on the last 3 pin socket of each connected lamp output. (Weld a 4/1W, 120 Ω resistor between the 2 and 3 pins of a 3 or 5 core pin XLR plug).



7. Control panel

7.1 Panel Introduction

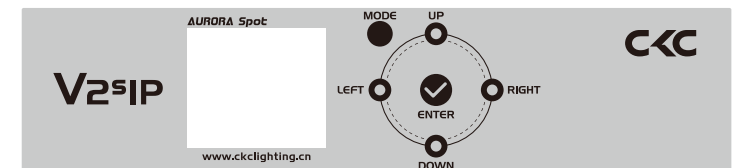

● Adopting a 1.8 "LCD display screen, the operation panel is equipped with a rechargeable battery, which can enter the menu to set address codes and make other settings without powering on;

● Press the MODE key to view or modify the lighting function settings, and press the UP, DOWN, LEFT, and RIGHT keys to select the function menu;

● Press the ENTER key to confirm your selected function menu, which will take you to the corresponding sub menu in the menu. Each menu item represents a specific function of the lighting fixture (as shown in the table below);

● Press the ENTER key to save your modifications or enter a submenu, and press the UP or DOWN key to modify values (increase or decrease values); Press the MODE key to return to the previous menu or exit.

● Press the MODE key to return to the previous menu or exit.

7.2、System menu

Note: The gray color block is the default setting value

Software Update Please Wait V2s IP Motor Reset Please Wait...		
DMX Settings	Set Address	A001~AXXX
	DMX Channel Mode	Basic 17 Standard 20 Extend 22
	No DMX Status	Hold Last Blackout Manual Internal Programs
	Prim/Sec Mode	Primary Secondary
	Status Settings	Pan Degree 630/540 Pan Invert ON/OFF Tilt Invert ON/OFF P./T. Feedback ON/OFF P./T. Speed Speed 1~2 Hibernation OFF,01M~99M,15M
	Fan Settings	Head Auto High Low
		Base Fan Auto High Low
	Zoom Speed	Standard Fast

Personality	Dim Modes	Standard Stage TV Architectural Theatre Stage2 Dim Speed(0.1s-10s)	
	LED Refresh Rate	900~1500Hz,2500Hz,4000Hz,5000Hz,6000Hz,10KHz,15KHz,20KHz,25KHz,1200Hz	
	Dim Curve	Square Linear Inverse Square S-Curve	
	Reset Motors	Reset All Motors Pan/Tilt Reset Color Reset Gobo Reset Focus/Zoom Reset Shutter Reset Other motors Reset	YES / NO YES / NO YES / NO YES / NO YES / NO YES / NO YES / NO
	Display	Intensity Display Invert Screen Saver Delay Key Lock	1-10 YES/NO OFF-10M 05M OFF/ON/ON1
	Service	Passcode	Effect Adjust (Calibration) 050 PAN 000-255 Tilt 000-255 Color1 000-255 Color2 000-255 ...
		Update Software	YES / NO
		Factory Restore (Passcode11)	YES / NO
Manual Control	Pan	000-255	
	Pan Fine	000-255	
	Tilt	000-255	
	Tilt Fine	000-255	
	000-255	
Internal Programs	Program 1	Speed	000-255
		Fade	000-255
	Program 2	Speed	000-255
		Fade	000-255
	Program 3	Speed	000-255
		Fade	000-255
	Program 4	Speed	000-255
		Fade	000-255

Info	Program 5	Speed	000-255
		Fade	000-255
	Program 6	Speed	000-255
		Fade	000-255
	Program 7	Speed	000-255
		Fade	000-255
	Fixture Life Time	Power On Time	xxxxxx Hours
		P-On Time-R	xxxxxx Hours
		P-On Time-Reset	Passcode 50
	Total LED Time	LED On Time	xxxxxx Hours
		LED On Time-R	xxxxxx Hours
		LED Hours Reset	Passcode 50
	Fixture Temps	LED's	Current
			Max Resettable
		Base Temp	Current
			Max Resettable
		Reset LED Temp	YES/NO Passcode 050
		Reset Base Temp	YES/NO Passcode 050
	Fixture Humidity	Head Base	xxx% xxx%
	Fan Info.(RPM)	LED Fan	xxxxRPM
		Base Fan	xxxxRPM
	DMX Values	Pan	
		Pan Fine	
		...	
	Error Logs	Frost	
		XXXXXX XXXXXX	List Errors one by one
		Reset Error Log	YES / NO Passcode (50)
	Software Version	1U: X.X.X	
		2U: X.X.X	
		3U: X.X.X	

8. DMX channel table:

16	19	22	Function	Values	
1	1	1	Pan	0~255	Pan Movement (540/630)
	2	2	Pan fine	0~255	Pan Fine
2	3	3	Tilt	0~255	Tilt Movement (270)
	4	4	Tilt fine	0~255	Tilt Fine

3	5	5	Color Wheel 1	0~9	Open
				10~16	Open / Red
				17~23	Red
				24~30	Red / Medium Blue
				31~37	Medium Blue
				38~44	Medium Blue / Green
				45~51	Green
				52~58	Green / Amber
				59~65	Amber
				66~72	Amber / Orange
				73~79	Orange
				80~86	Orange / High CRI Filter
				87~93	High CRI Filter
				94~100	High CRI Filter / CTB
				101~107	CTB
				108~114	CTB / UV
				115~121	UV
				122~127	UV / Open
				128~189	Clockwise Color Wheel Rotation, Fast -> Slow
				190~193	No Rotation
				194~255	Counter Clockwise Color Wheel Rotation, Slow -> Fast
4	6	6	Color Wheel 2	0~9	Open
				10~16	Open / Magenta
				17~23	Magenta
				24~30	Magenta / Blue
				31~37	Blue
				38~44	Blue / Green 485-525
				45~51	Green 485-525
				52~58	Green / Yellow
				59~65	Yellow Y525
				66~72	Yellow / CTB
				73~79	CTB
				80~86	CTB / Pink
				87~93	Pink
				94~100	Pink / UV
				101~107	UV
				108~114	UV/ CTO
				115~121	CTO
				122~127	CTO / Open
				128~189	Clockwise Color Wheel Rotation, Fast -> Slow

				190~193	No Rotation
				194~255	Counter Clockwise Color Wheel Rotation, Slow -> Fast
5	7	7	Gobo Wheel	0~4	Open
				5~19	Gobo 1
				20~34	Gobo 2
				35~49	Gobo 3
				50~64	Gobo 4
				65~79	Gobo 5
				80~94	Gobo 6
				95~109	Gobo 1 shake (slow-fast)
				110~124	Gobo 2 shake (slow-fast)
				125~139	Gobo 3 shake (slow-fast)
				140~154	Gobo 4 shake (slow-fast)
				155~169	Gobo 5 shake (slow-fast)
				170~189	Gobo 6 shake (slow-fast)
				190~221	Clockwise Gobo Wheel Rotation, Fast -> Slow
				222~223	No Rotation
				224~255	Counter Clockwise Gobo Wheel Rotation, Slow -> Fast
6	8	8	Gobo Rotation	0~127	Indexing
				128~189	Clockwise Gobo Rotation, Fast -> Slow
				190~193	No Rotation
				194~255	Counter Clockwise Gobo Rotation, Slow -> Fast
7	9	9	Shutter	0~31	Shutter closed
				32~63	Shutter open
				64~95	Strobe Slow to fast
				96~127	Shutter open
				128~159	Pulse effect Slow to fast
				160~191	Shutter open
				192~223	Random strobe Slow to fast
				224~255	Shutter open
8	10	10	Dimmer	0~255	Intensity 0 to 100%
		11	Dimmer fine	0~255	Dimmer Intensity Fine
				0~5	No Prism - Open
				6~66	Prism 1 (5 Facet Linear Prism)
				67~127	Prism 2 (6 Facet Circular Prism)
				128~135	Macro1
				136~143	Macro2
				144~151	Macro3
				152~159	Macro4
				160~167	Macro5

9	11	12	Prisms and Prism/Gobo Macros	168~175	Macro6
				176~183	Macro7
				184~191	Macro8
				192~199	Macro9
				200~207	Macro10
				208~215	Macro11
				216~223	Macro12
				224~231	Macro13
				232~239	Macro14
				240~247	Macro15
				248~255	Macro16
10	12	13	Prism Rotation	0~5	Prism Rot. Off
				6~128	Prism Indexing 0 ... 540°
				129~191	Clockwise Prism Rotation, Fast -> Slow
				192~192	No Rotation
11	13	14	Focus	0~255	0% to 100%
				0~255	Narrow to wide
				0~255	Narrow to wide 16-bit
				0~255	0% to 100%
12	14	15	Zoom	0~255	Narrow to wide
		16	Zoom fine	0~255	Narrow to wide 16-bit
13	15	17	Heavy Frost	0~255	0% to 100%
14	16	18	Medium Frost	0~255	0% to 100%
15	17	19	Dimmer Modes	0~20	Default to Unit Setting
				21~40	Standard
				41~60	Stage
				61~80	TV
				81~100	Architectural
				101~120	Theater
				121~140	Stage 2
				141	0.1 Sec.
				142	0.2 Sec.
				143	0.3 Sec.
				144	0.4 Sec.
				145	0.5 Sec.
				146	0.6 Sec.
				147	0.7 Sec.
				148	0.8 Sec.
				149	0.9 Sec.
				150	1.0 Sec.
				151	1.5 Sec.
				152	2.0 Sec.
				153	3.0 Sec.

				154	4.0 Sec.
				155	5.0 Sec.
				156	6.0 Sec.
				157	7.0 Sec.
				158	8.0 Sec.
				159	9.0 Sec.
				160	10 Sec.
				161~255	Default to Unit Setting
	18	20	Dim Curves	0~20	Square
				21~40	Linear
				41~60	Inv. Squa
				61~80	S. Curve
				81~255	No function
16	19	21	Pan/Tilt Speed	0~225	Pan/Tilt Fast -> Slow
				226~235	Blackout by movement
				236~245	Blackout by all wheel changing
				246~255	No function
				0~39	No function(1200 Hz LED Refresh Rate (Default)
				40~49	Fan Control - Low (Hold 3s)
				50~59	Fan Control - High (Hold 3s)
				60~69	Fan Control - Auto (Default) (Hold 3s)
				70~74	All motor Reset (Hold 3s)
				75~79	Pan / Tilt Reset (Hold 3s)
				80~84	Color Reset (Hold 3s)
				85~89	Gobo Reset (Hold 3s)
				90~94	Focus and Zoom Reset (Hold 3s)
				95~99	Shutter Reset (Hold 3s)
				100~104	No function
				105~109	Other motors Reset (Hold 3s)
				110~114	Enable Zoom Speed Fast(Hold 3s)
				115~119	Disable Zoom Speed Fast(Hold 3s)
				120~152	No function
				153~154	Hibernation Enable (Hold 3s)
				155~156	Hibernation OFF (Hold 5s)
				157~158	Display Backlight ON (Hold 3s)
				159~160	Display Backlight OFF (Hold 5s)
				161~162	Pan/Tilt Speed 1 (Default) (Hold 5s)
				163~164	Pan/Tilt Speed 2 (Hold 5s)
				165~166	Invert Pan ON (Hold 3s)
				167~168	Invert Pan OFF (Hold 5s)
				169~170	Invert Tilt ON (Hold 3s)

				171~172	Invert Tilt OFF (Hold 5s)
				173~173	900 Hz LED Refresh Rate (Hold 1s)
				174~174	910 Hz LED Refresh Rate (Hold 1s)
				175~175	920 Hz LED Refresh Rate (Hold 1s)
				176~176	930 Hz LED Refresh Rate (Hold 1s)
				177~177	940 Hz LED Refresh Rate (Hold 1s)
				178~178	950 Hz LED Refresh Rate (Hold 1s)
				179~179	960 Hz LED Refresh Rate (Hold 1s)
				180~180	970 Hz LED Refresh Rate (Hold 1s)
				181~181	980 Hz LED Refresh Rate (Hold 1s)
				182~182	990 Hz LED Refresh Rate (Hold 1s)
				183~183	1000 Hz LED Refresh Rate (Hold 1s)
				184~184	1010 Hz LED Refresh Rate (Hold 1s)
				185~185	1020 Hz LED Refresh Rate (Hold 1s)
				186~186	1030 Hz LED Refresh Rate (Hold 1s)
				187~187	1040 Hz LED Refresh Rate (Hold 1s)
				188~188	1050 Hz LED Refresh Rate (Hold 1s)
				189~189	1060 Hz LED Refresh Rate (Hold 1s)
				190~190	1070 Hz LED Refresh Rate (Hold 1s)
				191~191	1080 Hz LED Refresh Rate (Hold 1s)
				192~192	1090 Hz LED Refresh Rate (Hold 1s)
				193~193	1100 Hz LED Refresh Rate (Hold 1s)
				194~194	1110 Hz LED Refresh Rate (Hold 1s)
				195~195	1120 Hz LED Refresh Rate (Hold 1s)
				196~196	1130 Hz LED Refresh Rate (Hold 1s)
				197~197	1140 Hz LED Refresh Rate (Hold 1s)
				198~198	1150 Hz LED Refresh Rate (Hold 1s)
				199~199	1160 Hz LED Refresh Rate (Hold 1s)
				200~200	1170 Hz LED Refresh Rate (Hold 1s)
				201~201	1180 Hz LED Refresh Rate (Hold 1s)
				202~202	1190 Hz LED Refresh Rate (Hold 1s)
				203~203	1210 Hz LED Refresh Rate (Hold 1s)
				204~204	1220 Hz LED Refresh Rate (Hold 1s)
				205~205	1230 Hz LED Refresh Rate (Hold 1s)
				206~206	1240 Hz LED Refresh Rate (Hold 1s)
				207~207	1250 Hz LED Refresh Rate (Hold 1s)
				208~208	1260 Hz LED Refresh Rate (Hold 1s)
				209~209	1270 Hz LED Refresh Rate (Hold 1s)
				210~210	1280 Hz LED Refresh Rate (Hold 1s)
				211~211	1290 Hz LED Refresh Rate (Hold 1s)
				212~212	1300 Hz LED Refresh Rate (Hold 1s)

17 20 22

Special
Function

9. Control circuit diagram



10. Regular maintenance

10.1 Cleaning and maintenance

Lighting fixtures require daily cleaning and maintenance, and their service life largely depends on the operating environment and standards. If you have any questions, please consult our technical engineers for advice. Maintenance and repair work not included in this book should be entrusted to our qualified technical engineers.



Attention! Damage caused by dust, e-liquid, or other reasons, as well as abnormal use, is not covered by the warranty.



Warning !


Before opening any lid, disconnect the power supply. Cleaning optical components requires gentle wiping as the coating surface is prone to scratching. Do not use damaging liquids or hard objects, as they may damage the plastic or coating surface.

- When the lens is cracked or otherwise damaged, it should be replaced in a timely manner;
- When the brightness significantly decreases, the LED may have reached its expiration date and should be replaced in a timely manner;
- When the fixture cannot start, please check if the fixture power fuse is blown. If it is blown, a fuse of the same specification must be used for installation;
- The fixture is equipped with a temperature protection device. When the temperature is too high, the protection device will automatically reduce power.
- When this situation occurs, please check whether the fan is running normally, whether the fan and fan mesh are clogged with dust, identify the fault and repair it before starting the fixture. Please note that only qualified technicians are allowed to carry out maintenance work;
- To maintain smooth movement of the focusing lens, it is recommended to lubricate the guide rail of the focusing lens every three months. Excellent and high-temperature resistant lubricating grease should be used, and excessive grease should not be used as it can easily dirty adjacent components.

10.2 Fault analysis and handling

Fault description	Analysis	Processing method
No action after power on	Check if the power switch is turned on	Turn on
	Check if the fuse is blown	Replace
	Check if the output of PSU is normal	Detecting voltage
	Check if poor contact in the internal circuit	Reconnect

Uncontrolled lighting fixtures	Check if the DMX signal cable is connected correctly (If there is no signal, the display screen will flash)	Reconnect or replace
	Check if the address code is correct and if the DMX mode of the lighting fixture matches the settings	Reconfirm
	The main control PCB is damaged	Replace
Not bright	LED aging or damage	Replace
	Power PCB malfunction	Check/ Replace
	Loose or poor contact of the circuit	Reconnect
	PSU malfunction	Replace
Automatically turn off or dim the lights	LED aging	Replace
	Damaged cooling fan or abnormal wind speed	Replace
	Check the power output of the fan	Check/ Replace
	The temperature control switch is damaged	Replace
Gobo wheel misalignment or abnormal control	Poor contact of motor wire	Reconnect
	Corresponding motor drive board malfunction	Refixed
	Misalignment or magnetic damage between the magnetic tube and the positioning magnet	Adjust/Replace
	Motor malfunction	Replace
Weak light efficiency and uneven light spot	LED aging	Replace
	LED not centered with the lens	Adjust LED
	The optical mirror has accumulated dust or stains	Clean
	The optical mirror is damaged	Replace
Impure color	Weakening of light efficiency	Replace led PCB
	The color filter has accumulated dust or stains	Clean
	The color filter has been demolded or damaged	Replace

Gobo is unclear	The optical mirror has accumulated dust or stains	Clean
	The optical mirror is damaged	Replace
Head or base fan stops rotating	Check if the fan leads are installed properly or disconnected	Re connect
	Check if the fan is damaged	Replace
	Check if there are any other interfering objects within the operating range of the fan	Adjust
<div> Attention! The above analysis is for abnormal reference only. Non professionals are not allowed to disassemble and repair the machine</div>		

