

# LIGHTS LIVE!



## Tourist M6



Adopts 600W CW LED dual-display light source  
 Total luminous flux 25,600 lumens (High Brightness mode) / 17,000 lumens (High CRI mode)  
 Beam Angle 2° ~52° zoom  
 CCT 6500K  
 CRI 95  
 IP66 rating, resistant to harsh environments such as rain, dust, and extreme temperatures, suitable for both indoor and outdoor applications

**OPTIC**

- Source: 600W CW LED
- High Brightness Mode: 25600 Lm
- High CRI Mode: 17000 Lm
- CRI: 72 / 95 (Freedom to switch)
- Beam angle: 2 ~ 52°
- CCT: 6500 K
- Source lifetime: >20000 H

**EFFECT**

- Strobe: 1 ~ 25Hz
- Rotation gobo: 7 + 1
- Fixed gobo wheel: 8+1
- Color wheel: 7+ 1
- Linear CMY
- Linear CTO (2400~6500K)
- Prism: 6 linear+8 prism
- Frost: 2, 1 light +1 heavy
- Framing: With 4 blade, can achieve fast and smooth cutting. The framing direction and angle of each blade can be controlled separately, and the each blade can realize complete beam closing. The whole cutting module can be rotated by ±60°
- Animation + With iris

**CONTROL & PROGRAM**

- Channel: 46 / 60CH
- Protocol: DMX512, RDM, ArtNet, sACN
- Data connector: 3 PIN (or 5 PIN) XLR, RJ45
- Display: 2.8 inches touch screen, the operation panel has a rechargeable battery that allows you to access the menu to set the address code and make other settings without power on
- NFC: The lighting fixtures do not require power on and can be directly set up, diagnosed, and perform other functions through the CKC app

**SOFTWARE**

- Via DMX signal to update
- Static waterproof fan, intelligent speed control
- Intelligent temperature protection to ensure LED service life

**PAN & TILT MOVEMENT**

- Pan: infinite rotation (360°)
- Tilt: 270° 8bit/16bit

**HOUSING**

- Aluminum alloy structure + plastic (VO)
- Fan cooling
- Resistant to salt corrosion

**POWER CONSUMPTION**


- Voltage: AC 100V~240V 50/60Hz
- Rated power: 990 W

**OTHER**


- IP rating: IP66
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

**SIZE & WEIGHT**

- Size: 398 × 281 × 677 mm
- N.W: 30 kgs

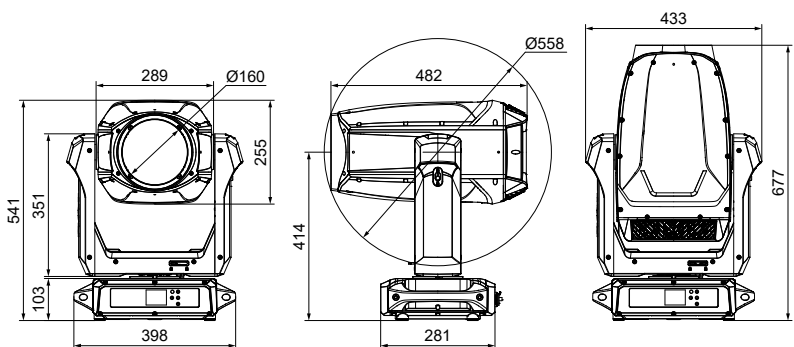

**PHOTOMETRICAL DATA**

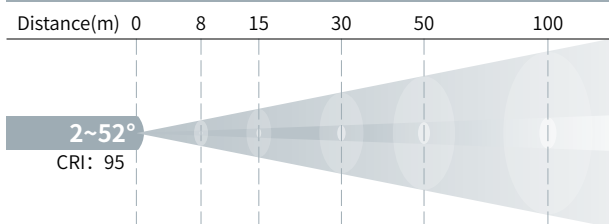

Distance(m)	0	8	15	30	50	100
Lux 2° CRI:95		48K	13.7K	3417	1230	308
Lux 2° CRI:72		84K	24K	5989	2156	539
Diameter(m)		0.28	0.52	1.05	2.75	3.49
Lux 52° CRI:95		367	104	26		
Lux 52° CRI:72		625	178	44		
Diameter(m)		7.80	14.63	29.26		


**ROTATION GOBO**



**FIXED GOBO**



**COLOUR**

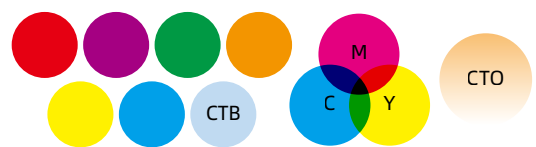

**FRAMING BLADES**



**ANIMATION PRISM FROST**

