

LIGHT TRICK



Soft Panel 600TW



Adopts 720W RGBWLC(Red, Green, Blue, White, Lime, Cyan) LED

Output: 34000 Lm

Beam angle: 67°

CCT: 2000K~ 10000K

TV station studio, professional stage, interview with reporters, shooting film and television lights, conference halls, etc.

OPTIC

- Source: 720W RGBWLC LED
- Output: 34000 Lm
- Beam angle: 67°
- Field angle: 109°
- CCT: 2000K ~ 10000K
- CRI: 95
- R9: 96
- TLCI: 94
- Source lifetime: >20000 H

EFFECT

- Strobe: 1 ~ 25 Hz
- Dimmer Curve: 4 kinds
- Built in effects: 2 kinds

CONTROL & PROGRAM

- Channel: 4-1/4-2/6/7/12-1/12-2/14/23/24/48/58/96 CH
- Protocol: DMX512, ArtNet/Kling Net, RDM
- Data connector: 3 PIN XLR (Optional: 5 PIN XLR) ,RJ45
- Display: OLED display
- Automatic color correction system ensures stable and consistent color and color temperature
- Potentiometer manual dimming, rapid color temperature selection, and color saturation selection

SOFTWARE

- Via USB & DMX signal to update
- Silent fan, intelligent speed regulation
- Intelligent temperature protection to ensure LED service life

HOUSING

- Aluminium alloy light housing
- Fan cooling (Intelligent speed regulation)

POWER CONSUMPTION


- Voltage: AC 100V~240V 50/60Hz
- Rated power: 505 W

OTHER


- IP rating: IP30
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 860 × 156 × 427 mm
- N.W: 15.3 kgs

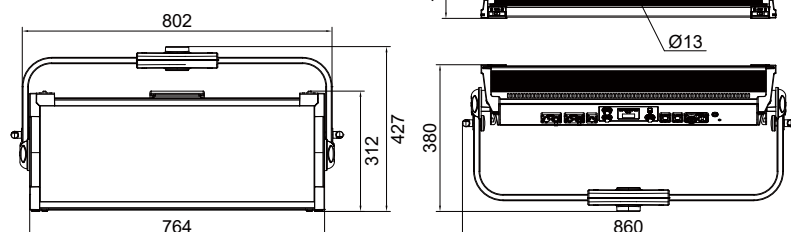

PHOTOMETRIC DATA

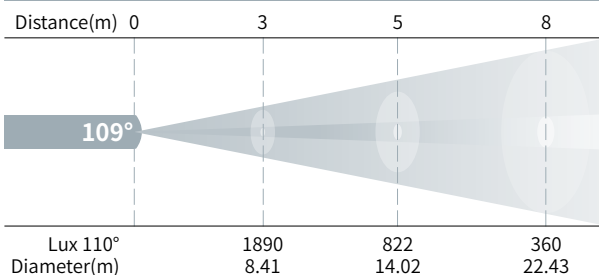

ACCESSORIES



Lattice



Softbox



Intensity lens




Egg crate



Manual rotation bracket



External battery holder



Barndoor