

CKC

LIGHT IT LIKE IT



Tourist M6



Adopts 600W CW LED dual-display light source
 Total luminous flux 25,600 lumens (High Brightness mode) / 17,000 lumens (High CRI mode)
 Beam Angle 2° ~52° zoom
 CCT 6500K
 CRI 95
 IP66 rating, resistant to harsh environments such as rain, dust, and extreme temperatures, suitable for both indoor and outdoor applications

OPTIC

- Source: 600W CW LED
- High Brightness Mode: 25600 Lm
- High CRI Mode: 17000 Lm
- CRI: 72 / 95 (Freedom to switch)
- Beam angle: 2 ~ 52°
- CCT: 6500 K
- Source lifetime: >20000 H

EFFECT

- Strobe: 1 ~ 25Hz
- Rotation gobo: 7 + 1
- Fixed gobo wheel: 8+1
- Color wheel: 7+1
- Linear CMY
- Linear CTO (2400~6500K)
- Prism: 6 linear+8 prism
- Frost: 2, 1 light +1 heavy
- Framing: With 4 blade, can achieve fast and smooth cutting. The framing direction and angle of each blade can be controlled separately, and the each blade can realize complete beam closing. The whole cutting module can be rotated by $\pm 60^\circ$
- Animation + With iris

CONTROL & PROGRAM

- Channel: 43CH/58CH
- Protocol: DMX512, RDM, ArtNet, sACN
- Data connector: 3 PIN (or 5 PIN) XLR, RJ45
- Display: 2.8 inches touch screen
- NFC: The lighting fixtures do not require power on and can be directly set up, diagnosed, and perform other functions through the CKC app

SOFTWARE

- Via DMX signal to update
- Static waterproof fan, intelligent speed control
- Intelligent temperature protection to ensure LED service life

PAN & TILT MOVEMENT

- Pan: infinite rotation (360°)
- Tilt: 270° 8bit/16bit

HOUSING

- Aluminum alloy structure + plastic (VO)
- Fan cooling
- Resistant to salt corrosion

POWER CONSUMPTION


- Voltage: AC 100V~240V 50/60Hz
- Rated power: 990 W

OTHER

- IP rating: IP66
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 398 × 281 × 677 mm
- N.W: 30 kgs

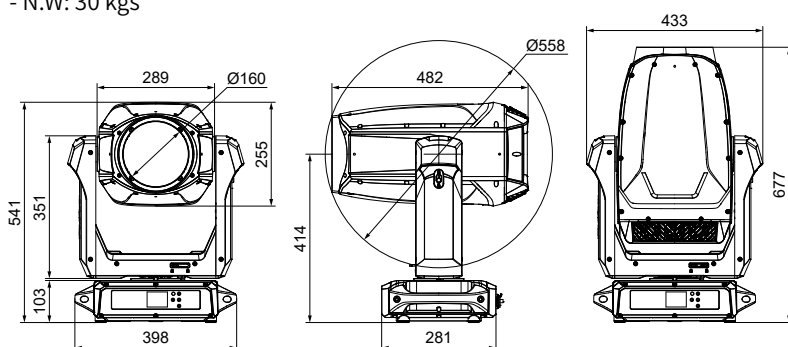

PHOTOMETRIC DATA

Distance(m)	0	8	15	30	50
2~52° CRI: 95					
Lux 2° CRI:95 CRI:72		51.3K 82.3K	14.6K 23.3K	3650 5825	1314 2097
Diameter(m)		0.28 0.52		1.05	1.75
Lux 52° CRI:95 CRI:72		429 692	129 207	32 51	
Diameter(m)		7.80 14.63		29.26	


ROTATION GOBO



FIXED GOBO



COLOUR

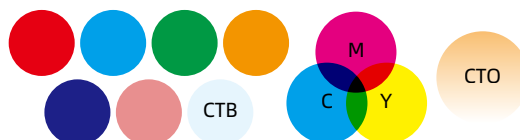

FRAMING BLADES



ANIMATION



PRISM



FROST

