



LIGHT IT LIKE IT



Tourist M9



Adopts 1500W CW LED dual-display light source
 Total luminous flux 55,000 lumens (High Brightness mode) / 35,000 lumens (High CRI mode)
 Beam Angle 6° ~50° zoom
 CCT 6500K
 Switchable Ra:95 R9:95
 IP66 rating, resistant to harsh environments such as rain, dust, and extreme temperatures, suitable for both indoor and outdoor applications

OPTIC

- Source: 1500W CW LED (High CRI + High Output)
- Output: 55000 Lm(High Brightness) / 35000 Lm(High CRI)
- Beam angle: 6 ~ 50°
- CCT: 6500K
- CRI: Ra/72 (High Brightness) Ra/95 • R9:95(High CRI)
- Lens diameter: 175 mm
- Source lifetime: >20000 H

EFFECT

- Strobe: 1~25Hz
- LED refresh rate: 1200Hz~25KHz
- Rotation gobo: Wheel 1 (6 + 1) / Wheel 2 (6 + 1)
- Gobo size: Outer diameter 30mm/Inner diameter 25mm/Thickness 1.1mm
- Color wheel: 5 + 1
- CMY + CTO
- Prism: 4 fact prism + 6 linear
- Frost: Light frost + Heavy frost
- Animation + With iris
- Framing: With 4 blade, can achieve fast and smooth cutting. The framing direction and angle of each blade can be controlled separately, and the each brade can realize complete beam closing. The whole cutting module can be rotated by $\pm 60^\circ$

CONTROL & PROGRAM

- Channel: 38/54 CH
- Protocol: DMX512, RDM, ArtNet/sACN
- Data connector: 3/5PIN XLR, RJ45 In/Out
- Display: 2.8 inches screen, the operation panel has a rechargeable battery that allows you to access the menu to set the address code and make other settings without power on

SOFTWARE

- Via DMX signal to update
- Static waterproof fan, intelligent speed control
- Intelligent temperature protection to ensure LED service life

PAN & TILT MOVEMENT

- Pan: 540° or 630° 8bit/16bit
- Tilt: 270° 8bit/16bit

HOUSING

- Aluminum alloy structure + plastic (VO)
- Fan cooling
- Resistant to salt corrosion

POWER CONSUMPTION


- Power in/out: Power tail to Industrial Socket 16A (or PowerCON TRUE1)
- Voltage: AC 100V~240V 50/60Hz
- Rated power: 1700 W
- Power factor: 0.99

OTHER

- CE compliant
- IP rating: IP66
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT


- Size: 450×316×819 mm(Normal version)
450×316×847 mm(Normal version)
- N.W: 43.6 kgs(Normal version)/45.2 kgs(Normal version)

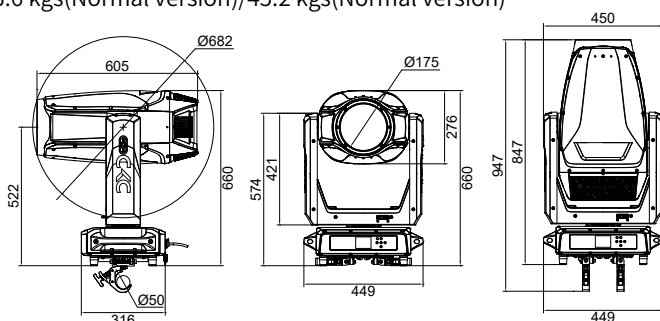


PHOTOMETRIC DATA

Distance(m)	0	8	15	30	50	100
6~50° CRI: 95 / 72						
Lux 6° CRI:72		50420	14300	3584	1290	323
CRI:95		32930	9420	2340	842	211
Diameter(m)		0.84	1.57	3.14	5.24	10.48
Lux 50° CRI:72		1850	526	132	47	
CRI:95		1280	364	91	8	
Diameter(m)		7.46	13.99	27.98	46.63	

ROTATION GOBO

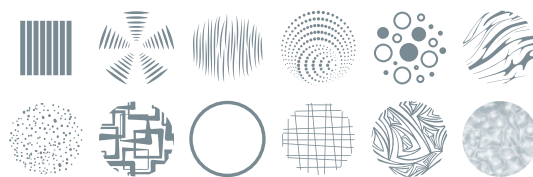

COLOUR

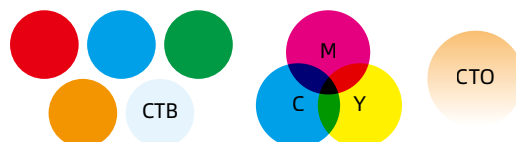

FRAMING BLADES



ANIMATION



PRISM



FROST

