

# LIGHTS

# LIKE IT



## Tourist M6



Adopts 600W CW LED dual-display light source  
 Total luminous flux 29,000 lumens (High Brightness mode) / 20,000 lumens (High CRI mode)  
 Beam Angle 2° ~52° zoom  
 CCT 6500K  
 CRI 95  
 IP66 rating, resistant to harsh environments such as rain, dust, and extreme temperatures, suitable for both indoor and outdoor applications

#### OPTIC

- Source: 600W CW LED
- High Brightness Mode: 29000 Lm
- High CRI Mode: 20000 Lm
- CRI: 72 / 95 (Freedom to switch)
- Beam angle: 2 ~ 52°
- CCT: 6500 K
- Source lifetime: >20000 H

#### EFFECT

- Strobe: 1 ~ 25Hz
- Rotation gobo: 7 + 1
- Fixed gobo wheel: 8+1
- Color wheel: 7+1
- Linear CMY
- Linear CTO (2400~6500K)
- Prism: 6 linear+8 prism
- Frost: 2, 1 light +1 heavy
- Framing: With 4 blade, can achieve fast and smooth cutting. The framing direction and angle of each blade can be controlled separately, and the each blade can realize complete beam closing. The whole cutting module can be rotated by  $\pm 60^\circ$
- Animation + With iris

#### CONTROL & PROGRAM

- Channel: 43CH/58CH
- Protocol: DMX512, RDM, ArtNet, sACN
- Data connector: 3 PIN (or 5 PIN) XLR, RJ45
- Display: 2.4 inches screen
- NFC: The lighting fixtures do not require power on and can be directly set up, diagnosed, and perform other functions through the CKC app

#### SOFTWARE

- Via DMX signal to update
- Static waterproof fan, intelligent speed control
- Intelligent temperature protection to ensure LED service life

#### PAN & TILT MOVEMENT

- Pan: infinite rotation (360°)
- Tilt: 270° 8bit/16bit

#### HOUSING

- Aluminum alloy structure + plastic (VO)
- Fan cooling
- Resistant to salt corrosion

#### POWER CONSUMPTION


- Voltage: AC 100V~240V 50/60Hz
- Rated power: 990 W

#### OTHER

- IP rating: IP66
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

#### SIZE & WEIGHT

- Size: 398 × 281 × 677 mm
- N.W: 30 kgs

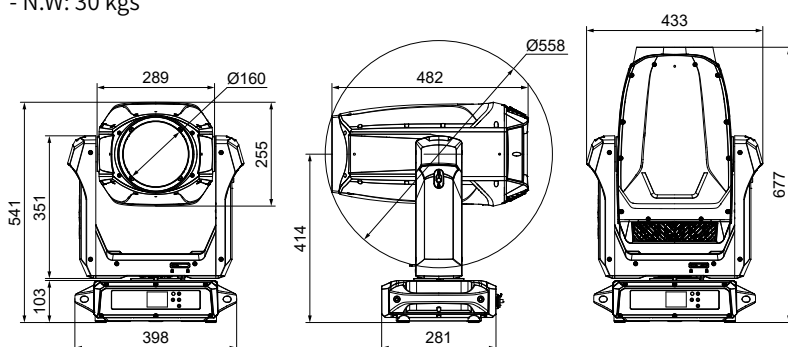

#### PHOTOMETRIC DATA

| Distance(m)                 | 0 | 8              | 15             | 30           | 50           |
|-----------------------------|---|----------------|----------------|--------------|--------------|
| 2~52°<br>CRI: 95            |   |                |                |              |              |
| Lux 2°<br>CRI:95<br>CRI:72  |   | 51.3K<br>82.3K | 14.6K<br>23.3K | 3650<br>5825 | 1314<br>2097 |
| Diameter(m)                 |   | 0.28<br>0.52   |                | 1.05         | 1.75         |
| Lux 52°<br>CRI:95<br>CRI:72 |   | 429<br>692     | 129<br>207     | 32<br>51     |              |
| Diameter(m)                 |   | 7.80<br>14.63  |                | 29.26        |              |

#### ROTATION GOBO



#### FIXED GOBO



#### COLOUR



#### FRAMING BLADES



#### ANIMATION



#### PRISM



#### FROST

