


LIGHT IT LIKE IT



P500 FC

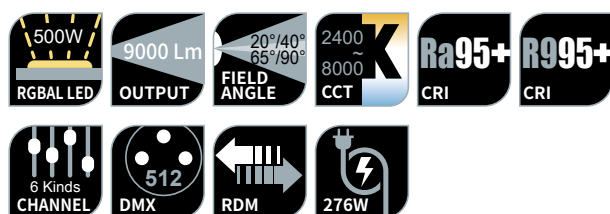

Adopts 500W RGBAL LED
 Total luminous flux 9000 Lm
 Beam angle: 13° /25° /45° /65° (Optional)
 Field angle: 20° /40° /65° /90°
 CCT: 2400K ~ 8000K
 Ra/95 R9/95

OPTIC

- Source: 500W RGBAL LED
- Output: 9000 Lm
- Beam angle: 13° /25° /45° /65° (Optional)
- Field angle: 20° /40° /65° /90°
- CCT: 2400K ~ 8000K
- Ra/95 R9/95
- Source lifetime: >20000 H

EFFECT

- Strobe: 1 ~ 25 Hz
- Dimmer Mode: 7 kinds
- Dimmer Cueve: 4 kinds

CONTROL & PROGRAM

- Channel: 1 / 6 / 11 / 18 / 9 / 14 CH
- Protocol: DMX512, RDM
- Data connection: 3 PIN XLR
- Display: O LCD display

SOFTWARE

- Via DMX & USB signal to update
- Intelligent temperature protection to ensure LED service life

HOUSING

- Die-cast aluminum construction
- Fan cooling (intelligent speed regulation)

POWER CONSUMPTION


- Voltage: AC 100V~240V 50/60Hz
- Rated power: 276 W

OTHER

- IP rating: IP65
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 278 × 354 × 394 mm
- N.W: 7 kgs

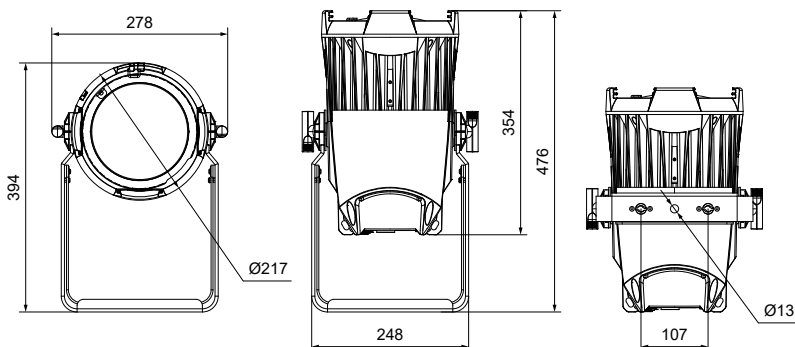

PHOTOMETRIC DATA

Distance(m)	0	3	5	8
65°				
Ra 95				
R9 95				
Lux 65°		1490	608	272
Diameter(m)		3.82	6.37	10.19

OPTIONAL ACCESSORY

