

LIGHT IT
LIKE IT



Footslim X



Adopts 240×0.3W RGBLA LED
 Output 3000Lm
 Field angle: X/108° Y/105°
 Ra/95 R9/95
 CCT: 2000 ~ 10000K

OPTIC

- Source: 240×0.3W RGBLA LED
- Output: 3000Lm
- Beam angle: X/68° Y/66°
- Field angle: X/108° Y/105°
- CCT: 2000 ~ 10000K
- CRI: Ra/95 R9/95
- Source lifetime: >20000 H

EFFECT

- Strobe: 1 ~ 25Hz
- LED refresh rate: 900Hz~25KHz
- Dimmer Curve: 4 kinds

CONTROL & PROGRAM

- Channel: 8CH/14CH/12CH1/12CH2/13CH/29CH
- Protocol: DMX512, RDM
- Data connector: Six-core power and signal combined input/output
- Display: OLED display

SOFTWARE

- Via DMX signal to update
- Intelligent temperature protection to ensure LED service life

HOUSING

- Aluminum alloy structure
- Natural heat dissipation

POWER CONSUMPTION

- Rated input voltage: AC 100V~240V 50/60Hz
- Power: 84 W

OTHER


- IP rating: IP66
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 1000 × 73 × 47 mm
- N.W.: 3.3 kgs



PHOTOMETRIC DATA

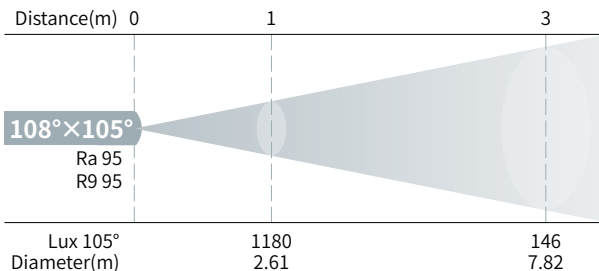

OPTIONAL ACCESSORY

