

LIGHT IT
LIKE IT



Footslim M



Adopts 120×0.3W RGBLA LED

Output 1500Lm

Field angle: X/98° Y/87°

Ra/95 R9/95

CCT: 2000 ~ 10000K

OPTIC

- Source: 120×0.3W RGBLA LED
- Output: 1500Lm
- Beam angle: X/56° Y/52°
- Field angle: X/98° Y/87°
- CCT: 2000 ~ 10000K
- CRI: Ra/95 R9/95
- Source lifetime: >20000 H

EFFECT

- Strobe: 1 ~ 25Hz
- LED refresh rate: 900Hz~25KHz
- Dimmer Curve: 4 kinds

CONTROL & PROGRAM

- Channel: 8CH/14CH/12CH1/12CH2/13CH/19CH
- Protocol: DMX512, RDM
- Data connector: Six-core power and signal combined input/output
- Display: OLED display

SOFTWARE

- Via DMX signal to update
- Intelligent temperature protection to ensure LED service life

HOUSING

- Aluminum alloy structure
- Natural heat dissipation

POWER CONSUMPTION

- Rated input voltage: AC 100V~240V 50/60Hz
- Power: 45 W

OTHER


- IP rating: IP66
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT


- Size: 500 × 73 × 47 mm
- N.W.: 1.8 kgs



PHOTOMETRIC DATA

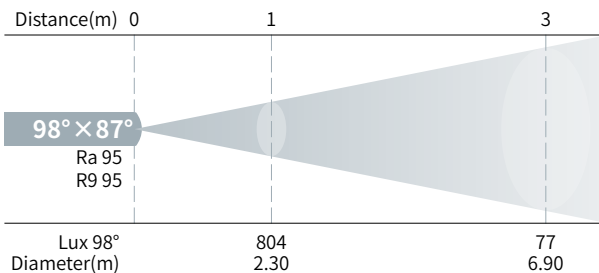

OPTIONAL ACCESSORY

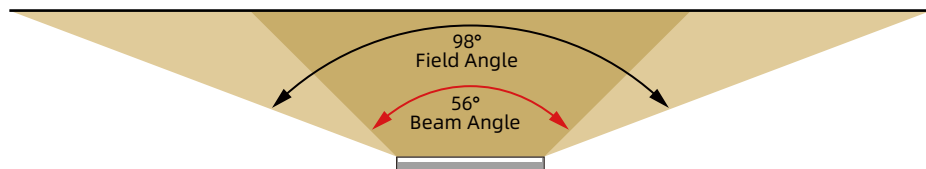

HORIZONTAL ANGLE



VERTICAL SERVICE RANGE

