


LIGHT MARKET



Mini Profile 40



Adopts 40W WW LED (Optional 3200K/4000K/5600K)
Zoom 15 ~ 30° (Optional 25 ~ 50°)
Output: 1970 Lm
CCT: 3200K
CRI: 98
Focus & Framing: Manual

OPTIC

- Source: 40W WW LED (Optional 3200K/4000K/5600K)
- Zoom range: 15 ~ 30° (Optional 25 ~ 50°)
- Output: 1970 Lm
- CRI: 98
- CCT: 3200K
- Source lifetime: >20000 H

EFFECT

- Strobe: 1~25Hz
- Gobo: 1
- Framing: Manual
- Dimmer Curve: 4

CONTROL & PROGRAM

- Channel: 1CH / 2CH / 4CH
- Protocol: DMX512
- Data connector: Wireless DMX
- Display: OLED display

SOFTWARE

- Intelligent temperature protection to ensure LED service life

HOUSING

- Aluminum alloy structure
- Natural heat dissipation

POWER CONSUMPTION


- Rated input voltage: AC 100V~240V 50/60Hz
- Power: 40 W

OTHER

- IP rating: IP30
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 142 × 317 × 227 mm
- N.W.: 1.23 kgs

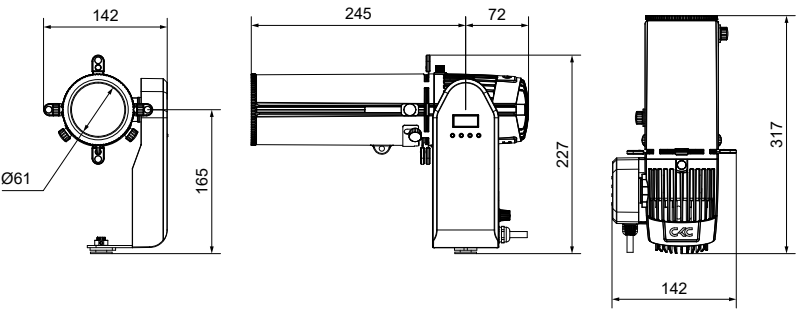

PHOTOMETRIC DATA

Distance(m)	0	3	5	8
Lux 15°		4270	1560	627
Diameter(m)		0.79	1.32	2.11
Lux 30°		1200	446	193
Diameter(m)		1.61	2.68	4.29