

LIGHT IT LIKE IT



Footslim M



Adopts 120×0.3W RGBLA LED

Output: 1500Lm

Field angle: 90×70°

CCT: 2400 ~ 8500K

CRI: 95+

OPTIC

- Source: 120×0.3W RGBLA LED
- Output: 1500 Lm
- Field angle: 90×70°
- CCT: 2400 ~ 8500K
- CRI: 95+
- Source lifetime: >20000 H

EFFECT

- Strobe: 1 ~ 25Hz
- LED refresh rate: 900Hz~25KHz
- Dimmer Curve: 4 kinds

CONTROL & PROGRAM

- Channel: 13CH / 18CH / 21 CH
- Protocol: DMX512, RDM
- Data connector: 3 PIN XLR
- Display: OLED display

SOFTWARE

- Via DMX signal to update
- Intelligent temperature protection to ensure LED service life

HOUSING

- Aluminum alloy structure
- Natural heat dissipation

POWER CONSUMPTION

- Voltage: AC 100V~240V 50/60Hz
- Rated power: 40 W

OTHER


- IP rating: IP66
- Work environment: -40°C ~ 45°C
- Startup environment: -20°C ~ 45°C

SIZE & WEIGHT

- Size: 500 × 73 × 47 mm
- N.W: 2 kgs



PHOTOMETRIC DATA

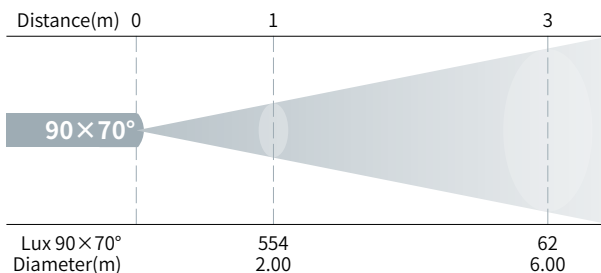


OPTIONAL ACCESSORY



Hanging Bracket

Connectors

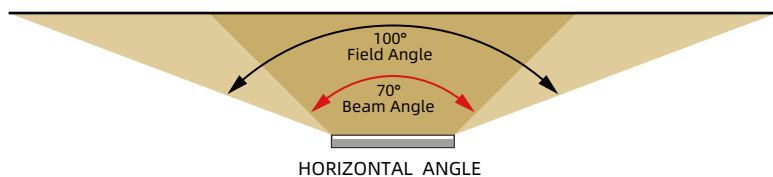

HORIZONTAL ANGLE

